


HT 400D Niska pješačka barijera

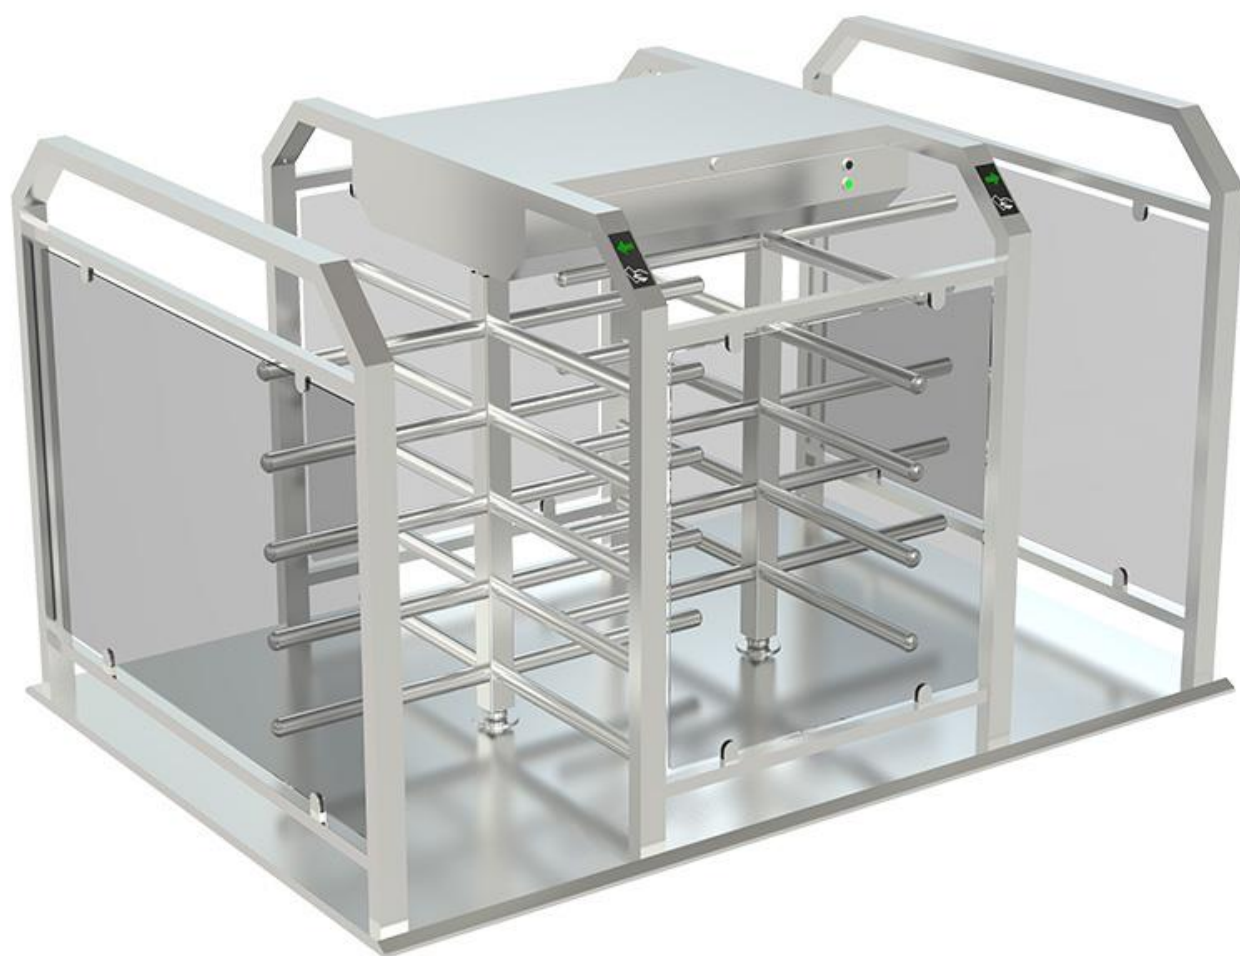

HT 400D Specifikacije

Power Requirements	110/220V. 60/50Hz. AC (%±10) 24V. DC At standby ~22 W. During operation ~ 120W.
Dimensions	1422 x 1250 x 2130 mm
Arms	A pair of, four-section (90°) rotors. Each section contains five Ø40mmx2mm, 304-Grade (Opt. 316-Grade) Stainless steel (Opt. Ø42 and Ø45mm) arms.
Body Features	Constructed on main carriers, supported by tubular profiles on lateral panels. 304- Grade stainless steel material (Opt. 316-Grade stainless steel). Top cover is protected against water for outdoors use, functionally complemented by side separator panels. Front panel and side separator panels are made of tempered glass or vertical stainless steel bars depending on choice.
Indicator Features	On the front panels, graphical RGB dot matrix status displays of Green Arrow and Red Cross are provided as standard feature.
Operating Temperature, Humidity, IP Rating, MCBF	-20°C to +68°C (Opt. -50°C with heater unit) / RH 95% non-condensing / IP 54 Outdoor Model (Opt. IP 56) / 1M Cycles
Control System	All inputs are opto-coupler protected .Controlled by dry contact or grounding input. Compatible with all access control systems that provide dry contact or grounding outputs. Optional RS232/RS485/TCP IP control module is available.
Operation	Manually operated bi-directional system (optional motorized) with dip switch selectable operational modes including controlled access on both-sides, one side free exit and restricted access modes.
Output Data	The system provides dry contact passage feedback by relays.
Emergency Mode	The rotor spins freely to allow free passage (Fail Safe default). Fail lock option is available.
Flow Rate	Passage Capacity of Mechanical unit for Manual Version= ~ 120 people/minute; Nominal= ~20-50 people/minute. (Recommended reference figure) ⚠ Please note that; the above given figures are approximations for one person per walkway or lane.
Standard Features	LED direction and status indicators
Optional Accessory and Applications	Remote control units (RF or with cable), interface unit for PC, RS485, RS232 and LAN, counter, audio-messaging system, floor mounting plate, coin slot/ intelligent coin system and coin box, card reader pole, seat limiter for stadium solutions, animated indicators, internal battery and charge unit, motor driven unit, heater positive unit, separators, card reader mounted bracket.

HT 400D Tehnički nacrt

