


SWG 101 Pješačka barijera



SWG 101 Specifikacije

| | |
|--|--|
| Power Requirements | None (standard version) / For electromagnetic lock version: 24v DC. (250 mA) |
| Wing Features | Ø27 x 2 mm wing flap specially bent 304-grade stainless steel. |
| Body Features | Ø89 x 3 mm 304-grade (Opt. 316-grade) stainless steel |
| IP Rating | IP 67 |
| System Features | Manually operated unidirectional, push to open (90° - clockwise or counter clockwise), spring loaded return system. For electromagnetic lock version in case of power failure the electromagnetic lock releases the panel for free passage |
| Optional Accessory and Applications | Electromagnetic Lock with 35 kgf resistance , manual lock, key lock pole, separator. |

MANUEL LOCKED

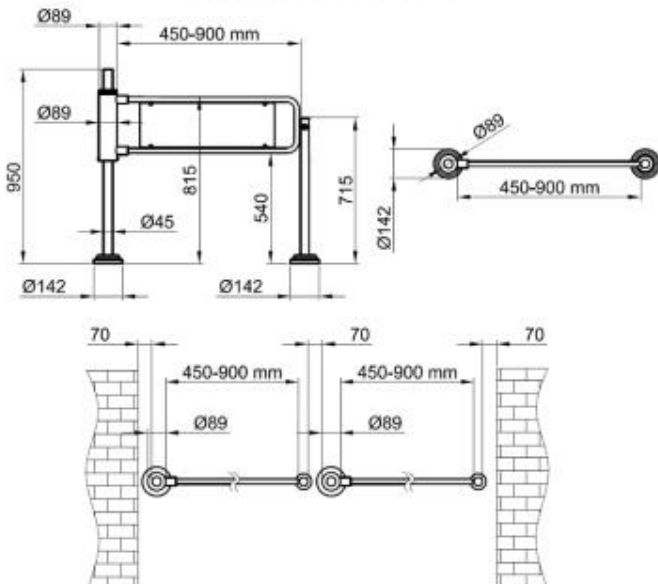

ELECTRO MAGNETIC LOCKED

